



X-BOX-LED 4

4x160W 48V LED - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-BOX LED has been created beginning from these characteristics. It is the best solution to your needs and guarantees 3300 sqm of illuminated area. 20 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



8,5m



1000Kg



340°



3300 sqm



220(l) - 0,55(l/h)

- Multi-directionally adjustable and tiltable floodlights
- 7 sections hydraulic vertical tower 8,5m, 340° rotatable
- Standard light sensor for machine power on and off
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 22 units per truck
- Central lifting eye longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up to 110 km/h
- 4 extendable & height adjustable stabilizers
- On board levels for guidance during stabilization

APPLICATIONS



Special events



Rural & hard to reach areas



Emergency response




Construction & work sites



Gas, oil & mining operations



Military applications



Illuminated area
3300 sqm



**Ease of transport
and handling**



**22
Units Per Truck**



**You can place 22 units on a
single vehicle thanks to one
of the compactest footprints
on the market.**

KEY BENEFITS

✔ *Low transport cost*

✔ *Low fuel consumption*

✔ *LED lamps mean NO replacement of*
• *bulbs*
• *lamp glass*
• *ballast*
• *capacitors*
Reducing Call Out Costs



LIGHT SENSOR
FEATURED AS STANDARD

SAFETY VERTICAL MAST

48 VOLT COILED CABLE

GALVANIZED BODY
DURABLE ANTI-CORROSION
PROTECTION

FORK LIFT POCKET

technical data

Dimensions & weight

Dimensions min. (mm)	1200x1200x2560
Dimensions max. (mm)	2520x2520x8500
Total weight without fuel	1000 Kg

Features

Rotation	340°
Floodlights	4x160W
Lamps	LED
Options	Timer

Alternator


Model	Synchronous
Frequency (Hz)	50
Insulation class	H
Degree of protection	IP23
Single phase voltage	3,5 kVA - 230V
Auxiliary outlets	1,5 kVA

Engine

Model	Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (l)	220
Consumption (l/h)	0,55
Running time (h)	400
Noise level (dBA) at 7m	65

Standard load delivery



22 sets

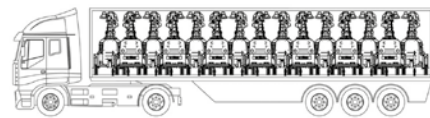

Units Per Truck

Illuminated area

3300 sqm

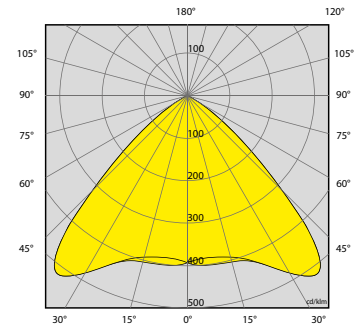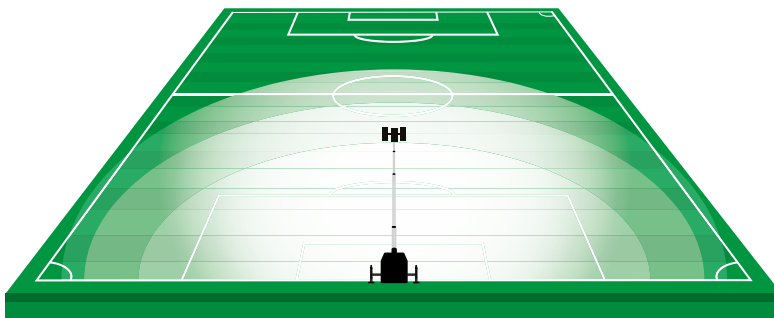

Эксклюзивный официальный дистрибьютор TRIME на территории России и СНГ

+7 (495) 532-37-34 | +7 (925) 741-89-01
8 (800) 222-51-05 (Бесплатно для всех регионов)

www.legion-tehno.ru | trime@legion-tehno.ru

Компания TRIME оставляет за собой право изменять технические характеристики и товары, описанные в этом каталоге, в любое время и без предварительного уведомления по техническим или коммерческим причинам. Изображения продуктов показаны только