



TRIME®

Lighting Towers



LED TECHNOLOGY

450 sqm

Area illuminated

Leader in sustainability 

BATTERY Line



Rail maintenance



Road maintenance




Security



Special events



Military applications

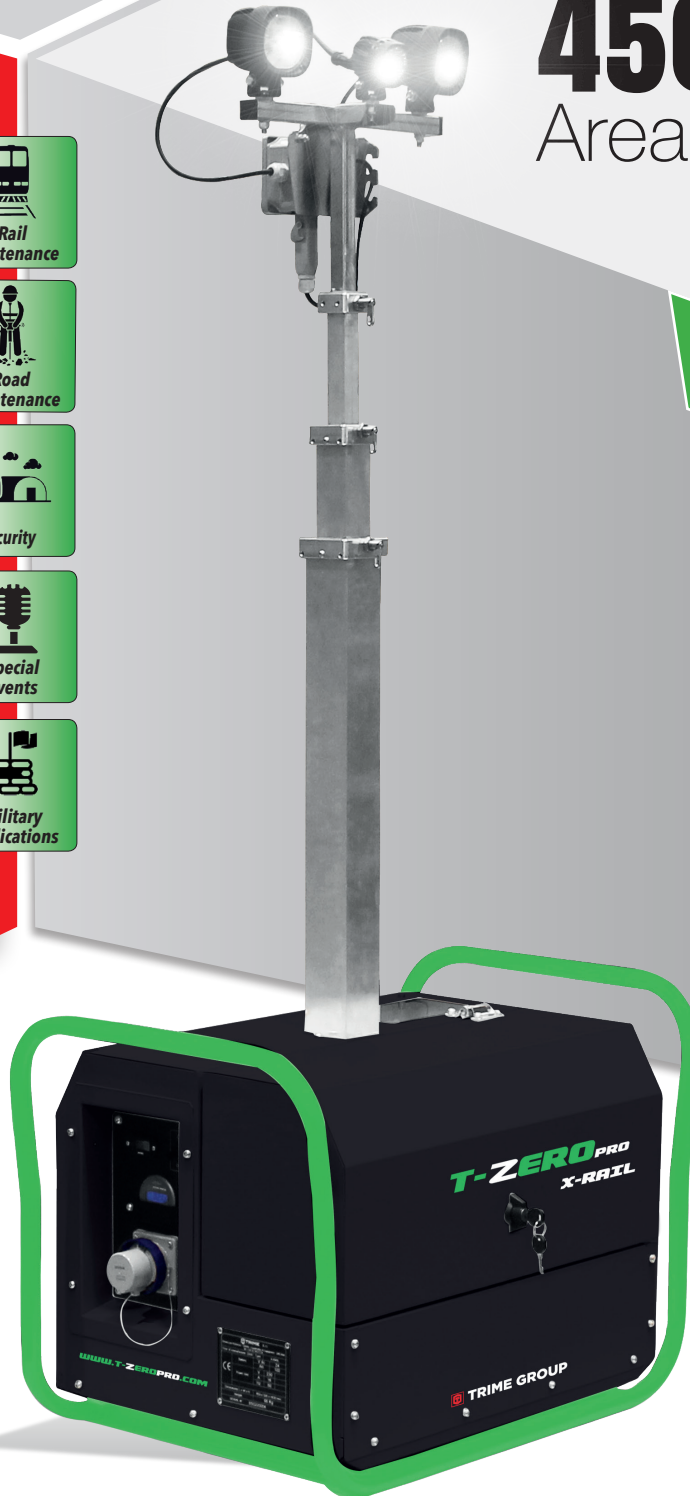

X-RAIL

2x29W+1x13W LED

T-ZERO^{PRO}




Operation: 100% BATTERY
Power Battery Pack 25,9Vdc 200Ah

X-RAIL

2x29W+1x13W LED

T-ZERO PRO

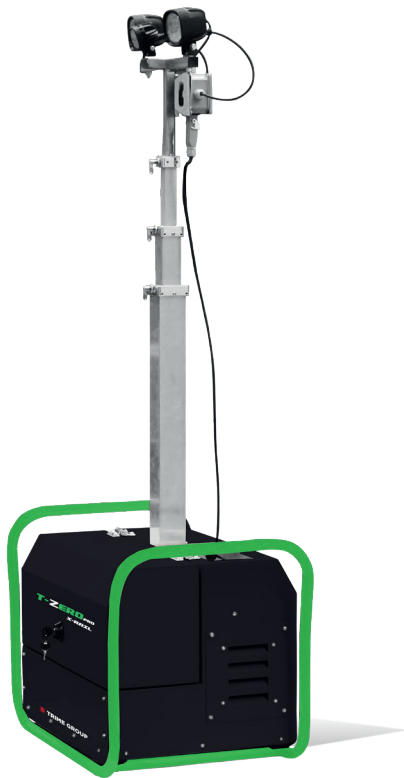

FEATURES

- 25,9V 200Ah Lithium Battery Built-in
- Battery Charger 24V 60A (230V 1Ph Built-in)
- Mains Input 230V 16A
- Battery Charger Gauge
- Floodlights Hour meter
- Removable lithium battery
- Full aluminum body
- Tubular Frame for manual handling
- Multi-directionally adjustable and tiltable floodlights
- 3 section galvanized telescopic vertical mast
- Maximum mast height 3120mm
- Manual lifting system
- 80 µm powder coating
- **Very compact dimensions for easy handling & transportability, up to 42 units per truck**
- Light weight for improved manoeuvrability
- **60hrs running time from battery**
- **3hrs recharge**

ZERO
CARBON EMISSION



100%
BATTERY



first unique battery driven

Leader in
sustainability



RUNNING TIME
60 H




ZERO
noise



450sqm
area illuminated



42 units
per truck



VERY COMPACT DIMENSIONS
for easy handling & transportability



Dimensions & weight	Dimensions min (mm)		Dimensions max(mm)		Total weight (kg)	Frame (kg)	Battery weight (kg)	Must+floodlight weight (kg)
		867x627x1824 (LxWxH)		867x627x3120 (LxWxH)		63	28	24
Floodlights	Type		Power (each)		IP level	Illuminated area (sqm)		
	Led		2x29W+1x13W		65	450		
Mast	Lifting method		Max Height			Max Wind Speed		
	Manual		3120 mm			110 km/h		
Battery	Type	Battery number	Power Battery Pack	Running time	Battery charger	Charging time with floodlights off	Expected battery cycle	Expected battery life
	LITHIUM	1	25,9Vdc 200 Ah	60 h	230V 1Ph Built-in	3 h	2000	60000 h



TRIME[®]

Lighting Towers

Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it