



TRIME®

Lighting Towers



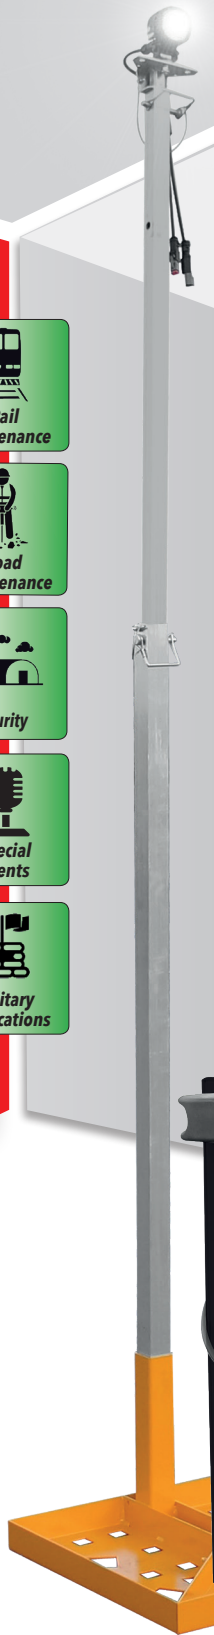

LED TECHNOLOGY

1300 sqm

Area illuminated

Leader in sustainability

BATTERY Line

Operation: 100% BATTERY
Rated voltage 25,9V 200ah

X-RAIL KIT

25,9V200AH +9 MAST - LED

T-ZERO PRO


X-RAIL KIT

25,9V200AH +9 MAST - LED

T-ZERO PRO



9 cables (9mt each) included in the KIT



FEATURES

- 25,9V 200Ah Lithium Battery Built-in
- External Battery Charger 24V 80A 230V 1Ph
- Mains Input 230V 16A
- Battery Charger Gauge
- Floodlights Hour meter
- Removable lithium battery
- Full aluminum body
- 2 Tubular Frames for manual handling
- 9 external connectable masts
- Maximum mast height 3225mm (each mast)
- Manual lifting system
- 80 µm powder coating
- **Very compact dimensions for easy handling & transportability, (X-Rail + External Battery Charger + 9External Masts)**
- Light weight for improved manoeuvrability
- **41 hrs running time from battery**
- **± 3 h 40 min. recharge**
- 9 cables (9mt each) included in the KIT



X-RAIL Dimensions & weight	Dimensions (mm)		Weight (kg)				
	858x333x590 (LxWxH)		56				
Battery	Type	Battery number	Rated voltage	Running time	Charging time with floodlights off	Expected battery cycle	Expected battery life
	LITHIUM	1	25,9V 200 ah	41 h	± 3 h 40 min	2000	60000 h
External Battery Charger	Dimensions (mm)		Weight (kg)	Type	Mains input		
	867x627x3120 (LxWxH)		13	24V 80A	230V 16A		
Floodlights (External Mast)	Type	Quantity	Power (each)	IP level	Illuminated area (sqm)		
	Led	9	13W	65	1300		
External Mast	Dimensions min. each (mm)		Dimensions max. each (mm)	Lifting method	Weight each (kg)	Max. wind Speed	
	500x1827		500x3220	Manual	12	110 km/h	



TRIME[®]
Lighting Towers

Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it